


19 Inch Touch Monitor

Model : RCS-TM190

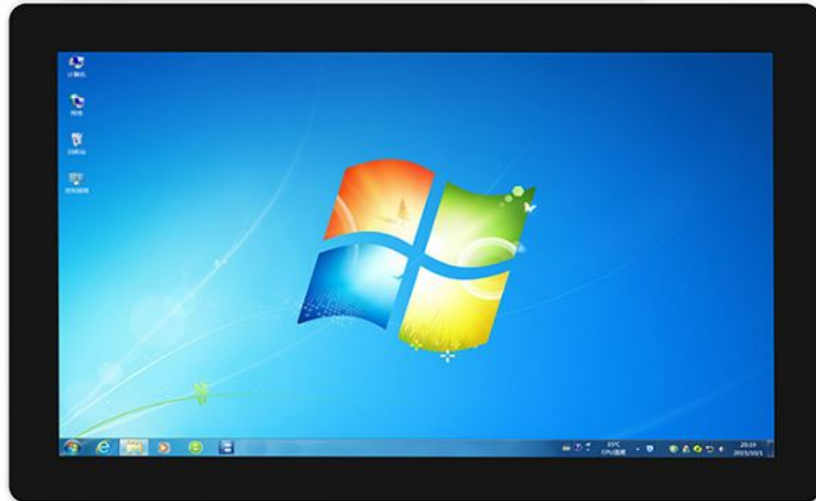

<https://www.casino-screen.com>

<https://www.szrcloud.com>

19 Inch Touch Monitor

◆ Product Specifications

LCD Monitor		
Display Type	16:9 Ratio, 19 inch TFT-LCD	
Active Area	37.48x29.98	
Monitor Dimensions (WxHxD)	42.81x35.48x4.97 (cm)	
Suggested Resolution	1280x1024	
Support Colors	16.7M	
Brightness (Typ.)	Pure LCD Panel	250cd/m2
	With Touch Monitor	330cd/m2
Response Time (Typ.)	8/8(ms)	
Viewing Angle (Typ.atCR > 10))	Horizontal (left/right)	178/178(°)
	Vertical (up/down)	178/178(°)
Contrast Ratio (Typ.)	1000 : 1	
Video Input/Interface	VGA/DVI/HDMI	
Frequency (H/V)	37.9~80KHz / 60~75Hz	
PowerSupply	Type: External Display voltage: DC12V±5% Input(line) voltage: AC100-240V,50-60Hz	
Environment	Operating Temp.	-10 ~ +65(°C)
	Operating RH	10%~90%
	Storage Temp.	-20~60°C
	Storage RH	5%~90%
MTBF	≥30,000 Hours	
LED Backlight Life Time (Typ.)	40,000 Hours	
Weight (N.W/G.W)	10Kgs / 8Kgs	
Dimensions	42.81x35.48x4.97 (mm)	
Power Consumption	Stand by Power:≤1W/Operating Power:≤28W	
Mount Interface	VESA 100/ VESA 75	
OSD Control	Buttons	AUTO,+,POWER,-,MENU
	Function	Brightness,Contrast Ratio,Auto-adjust,Phase,Clock,H/V Location,Languages,Function,Reset

19 Inch Touch Monitor

Touch Screen

Touch Type	19 inch Projected Capacitive Touch screen
Touch Input/Interface	USB
Response Time	≤10ms
Hardness	Min. 7H
Light Transmittance	≥85%
Support System	Windows; Linux; Mac; Android
Active Area	37.48x29.98 (mm)
Cover Glass Thickness	3.0±0.2 (mm)
Touch Test	≥50,000,00
Touch Controller	EETI/ILI/ Siliconworks (optional)

NOTE :

- ① The display SPECS. are adjusted according to the selected LCD screen and touch screen
- ② The support system is adjusted according the specific system and version.

◆ Installation dimension drawing

